

HVK

铝电解电容器-贴片型

Aluminum electrolytic capacitor- SMD type

特点 Features

- 125°C 1000~2000小时保证品。Load life of 1000-2000 hours at +125°C.
- 产品尺寸：Product size：Φ6.3~Φ13.
- 适用于车载电装品的高温用途。
Vailable for high-temperature application of vehicle-mounted electrical appliances.
- RoHS指令(2002/95/EC)已对应完毕。Adapted to the RoHS directive(2002/95/EC) .




主要技术性能 Specifications


项目 Items	特性 Performance Characteristics					
工作温度范围 Operating Temperature Range	-40~+125℃					
额定电压范围 Rated Voltage Range	10~50V					
标称容量范围 Nominal Capacitance Range	10~1000μF					
标称容量允许偏差 Nominal Capacitance Tolerance	±20%(20℃, 120Hz)					
漏电流 Leakage Current	I≤0.01 CRVR or 3(μA), 取较大者(2分钟) CR: 标称容量(μF) UR: 额定电压(V) I≤0.01 CRVR or 3(μA) Whichever is greater(at 20℃, after 2 minutes) CR: Nominal Capacitance (μF) UR: Rated voltages (V)					
损耗角正切(tgδ) Dissipation Factor (Max) 20℃, 120Hz	U _R (V)	10	16	25	35	50
	tgδ	0.30	0.24	0.20	0.17	0.14
耐久性 Load Life	+125℃连续加1000-2000小时额定电压小时后, 电容器应满足以下要求: After 1000-2000hours' application of rated voltage at 105℃, the capacitor shall meet the following requirement:					
	规定时间 Specified time	Φ6.3 × 5.8~Φ6.3 × 7.7:1000小时 Φ8~Φ13:2000小时				
	电容量变化率 Capacitance Change	±30%初始值 Within ±30% of the initial value				
	损耗角正切 Dissipation Factor	≤ 300%初始规定值 Not more than 300 % of the initial specified value				
	漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value				
高温贮存 Shelf Life	+125℃贮存1000小时后, 加额定工作电压30分钟, 电容器应满足以上耐久性要求 After storage for 1000 hours at +125℃, UR to be applied for 30 minutes, the capacitors shall meet the requirement of load life above					
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U _R (V)	10	16	25	35	50
	Z(-25℃)/Z(+20℃)	6	5	4	3	3
	Z(-40℃)/Z(+20℃)	12	8	6	4	4
耐焊接热 Resistance to Soldering Heat	在250℃的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250℃ for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.					
	电容量变化率 Capacitance Change	±10%初始值以内 Within ±10% of the initial value				
	损耗角正切 Dissipation Factor	≤ 初始规定值 Not more than the initial specified value				
	漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value				

外形图及尺寸表 Case Size Table

Φ6.3

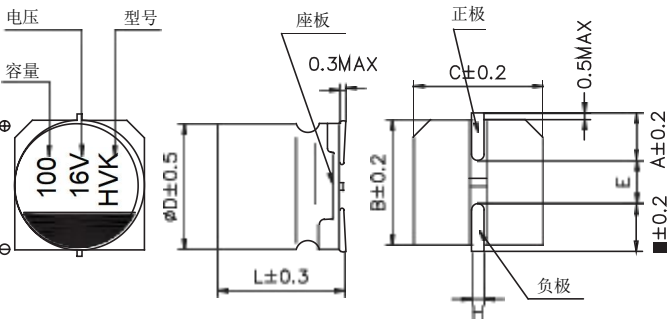

Φ8~Φ13

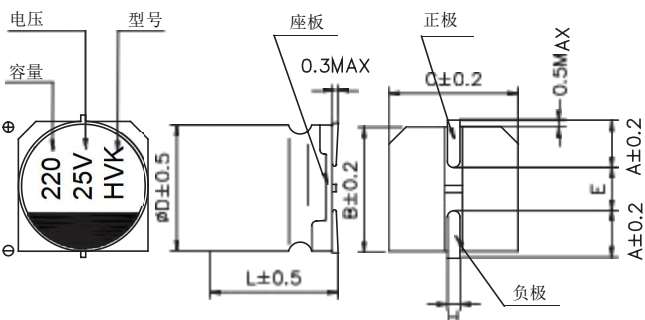

单位 Unit: mm

	6.3×5.8	6.3×7.7	8×10.5	10×10.5	10×13	13×13.5
A	2.4	2.4	2.9	3.2	3.2	4.7
B	6.6	6.6	8.3	10.3	10.3	13
C	6.6	6.6	8.3	10.3	10.3	13
E	2.2	2.2	3.1	4.5	4.5	4.5
L	5.8	7.7	10.5	10.5	13	13.5
H	0.5~0.8		0.8~1.1			

标称电容量、额定电压、额定纹波电流与尺寸对应表
Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

电压 WV (Vdc)	容量 Cap (μF)	产品 尺寸 Size	纹波电流 mArms 120Hz/125°C	电压 WV (Vdc)	容量 Cap (μF)	产品尺寸 Size	纹波电流 mArms 120Hz/125°C
10	68	6.3 × 5.8	50	35	10	6.3 × 5.8	50
	100	6.3 × 7.7	75		47	6.3 × 7.7	70
	220	8 × 10.5	130		100	8 × 10.5	130
	470	10 × 10.5	180		220	10 × 10.5	180
	1000	13 × 13.5	480		330	13 × 13.5	480
16	33	6.3 × 5.8	50	50	10	6.3 × 5.8	50
	100	6.3 × 7.7	75		22	6.3 × 7.7	70
	220	8 × 10.5	130		47	8 × 10.5	130
	330	10 × 10.5	180		100	10 × 10.5	180
	470	13 × 13.5	480		220	13 × 13.5	357
25	22	6.3 × 5.8	50				
	47	6.3 × 7.7	70				
	100	8 × 10.5	130				
	220	10 × 10.5	180				
	470	13 × 13.5	480				

额定纹波电流频率修正系数
Frequency correction factor for ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	≥10KHz
Coefficient 系数	0.85	1.00	1.17	1.36	1.50