


HFC 系列 Series

特点 Features


- 高頻高可靠品，105°C, 3000-5000小时。
High frequency High reliability , 105°C , 3000-5000hours.
- 适用于无刷电机驱动及耐大电流冲击。
Used Suitable for brushless motor drive and large current impact resistance .
- 符合RoHS标准。RoHS compliant.

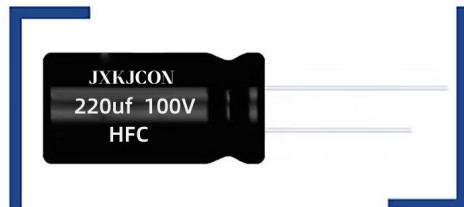

主要技术性能 Specifications

项目 Items	特性 Characteristics										
使用温度范围 Operating Temperature Range	-40~+105°C										
额定电压范围 Rated Voltage Range	50~120 V										
标称电容量范围 Nominal Capacitance Range	220~1000μF										
标称电容量允许偏差 Nominal Capacitance Tolerance	± 20% (120Hz, +20°C)										
漏电流 Leakage Current	$I \leq 0.01CV$ or $3(\mu A)$ 2分钟(at 20°C, after 2 minutes) 取较大者 (whichever is greater)										
损耗角正切值(tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <tr> <td>U_R(V)</td> <td>50</td> <td>63-120</td> </tr> <tr> <td>tgδ</td> <td>0.10</td> <td>0.08</td> </tr> </table> <p>容量大于1000μF者，每增加1000μF，其损耗角正切值增加0.02。 When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase.</p>	U_R (V)	50	63-120	tgδ	0.10	0.08				
U_R (V)	50	63-120									
tgδ	0.10	0.08									
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>U_R(V)</td> <td>50-120</td> </tr> <tr> <td>$Z-40^\circ C / Z+20^\circ C$</td> <td>4</td> </tr> </table>	U_R (V)	50-120	$Z-40^\circ C / Z+20^\circ C$	4						
U_R (V)	50-120										
$Z-40^\circ C / Z+20^\circ C$	4										
耐久性 Load Life	<p>在+105°C 条件下，施加含额定纹波电流的额定电压，持续规定时间，并在+20°C下恢复16小时后，电容器应符合下列要求： The following specifications shall be met when the capacitors are restored to +20°C for 16 hours after D.C. bias rated ripple current is applied at +105°C, the peak voltage shall not exceed the voltage.</p> <table border="1"> <tr> <td>ØD</td> <td>10</td> <td>13</td> <td>>13</td> </tr> <tr> <td>Load life</td> <td>3000h</td> <td>4000h</td> <td>5000h</td> </tr> </table> <p>电容量变化率 Capacitance change : $\pm 20\%$ 初始测量值以内 $\pm 20\%$ of the initial measured value 漏 电 流 Leakage current : \leq 初始规定值 \leq Initial specified value 损耗角正切值 Dissipation factor : ≤ 2倍初始规定值数 ≤ 2 times of the initial specified value</p>			ØD	10	13	>13	Load life	3000h	4000h	5000h
ØD	10	13	>13								
Load life	3000h	4000h	5000h								
高温贮存 Shelf Life	<p>+105°C, 1000小时贮存后，恢复16小时后： After storage for 1000 hours at +105°C and then resumed for 16 hours:</p> <p>电容量变化率 Capacitance change : $\pm 20\%$ 初始测量值以内 $\pm 20\%$ of the initial measured value 漏 电 流 Leakage current : ≤ 2倍初始规定值 ≤ 2 times of the initial specified value 损耗角正切值 Dissipation factor : ≤ 2倍初始规定值 ≤ 2 times of the initial specified value</p>										

外形图及尺寸表 Case Size Table

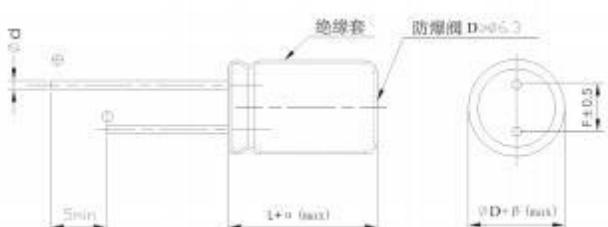

单位 Unit: mm

ØD	10	13	16	18
L	/	20,25	30,35	30,35,40
F	5.0	5.0		7.5
d	0.6	0.6		0.8
α(max)			(L<20) 1.5 (L≥20) 2.0	
β(max)			0.5	

频率修正系数 Frequency Coefficient

频率 Frequency(Hz)	120	1K	10K	100K
修正系数 Coefficient	0.5	0.8	1	1

尺寸 Dimensions

容量 $C_r(\mu F)$	代码 Code	项目 Item	电压 U_r	50V(1H)			63V(1J)			80V(1K)		
				Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple
				$\varphi D \times L(\text{mm})$	(Ω MAX)	(mA)	$\varphi D \times L(\text{mm})$	(Ω MAX)	(mA)	$\varphi D \times L(\text{mm})$	(Ω MAX)	(mA)
220	221		221	10×20	0.098	466	10×20	0.096	765	13×20	0.096	985
330	331		331	10×20	0.075	998	13×20	0.096	1092	13×25	0.096	1208
470	471		471	13×20	0.048	1192	13×20	0.068	1426	16×25	0.048	1579
680	681		681	13×20	0.042	1535	13×25	0.048	1705			
1000	102		102	16×30	0.038	1833	16×25	0.042	1832	16×30	0.035	2106

容量 $C_r(\mu F)$	代码 Code	项目 Item	电压 U_r	100V(2A)			120V(2N)		
				Size	ESR	Ripple	Size	ESR	Ripple
				$\varphi D \times L(\text{mm})$	(Ω MAX)	(mA)	$\varphi D \times L(\text{mm})$	(Ω MAX)	(mA)
220	221		221	13×25	0.096	989	16×25	0.42	1105
330	331		331	16×25	0.066	1385	18×25	0.38	1515
470	471		471	16×25	0.058	1733			
680	681		681						
1000	102		102	18×40	0.038	2317			

Size $\varphi D \times L(\text{mm})$

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Maximum ESR (Ω) at 20°C 100kHz